

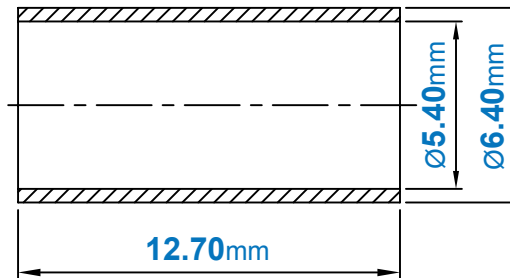


20-SMA1002

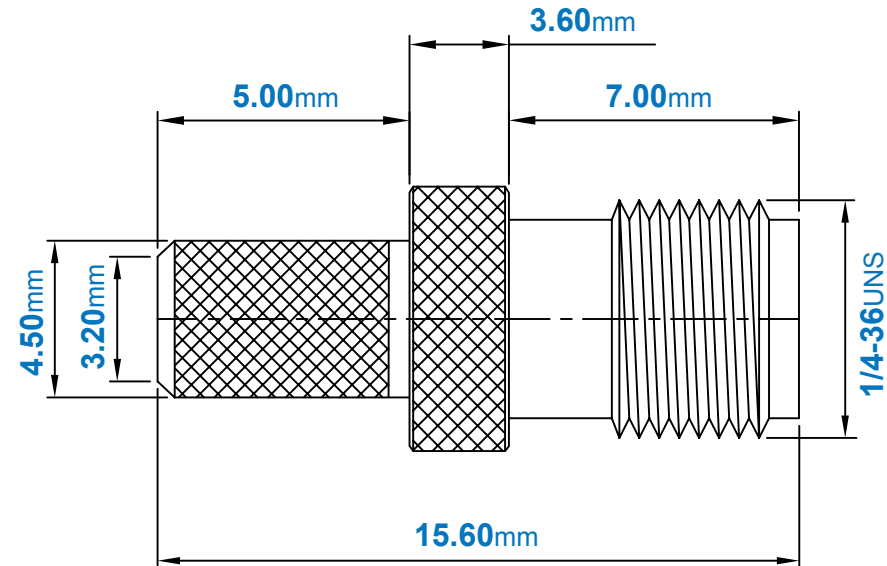

	Material	Coating
Ferrule	COPPER	GOLD
Pin	BRASS	GOLD
Body	BRASS	GOLD
Dielectric	TEFLON	NONE

* Major dimension
UNLESS OTHERWISE NOTED TOLERANCES
0.5-6=±0.2
6-30=±0.4
30-120=±0.6
120-315=±1.0
ANGLES=±1°

Unless otherwise specified
REMOVE ALL BURRS.
BREAK ALL CORNERS & EDGES CO.15 MAX.
CHAMFER 1ST & LAST THREADS 45°.
DIAMETERS ON COMMON CENTERS.
TO BE CONCENTRIC WITHIN 0.1 T.I.R.
ALL DIMENSIONS ARE AFTER PLATING.

RoHS 50 Ohm

SMA FEMALE CRIMP

Suitable for the following cable types
RG58, CELF200, LMR195, LMR200, AIRCELL5
,Belden 9203, RG141, HDF200, RG142, RG400