
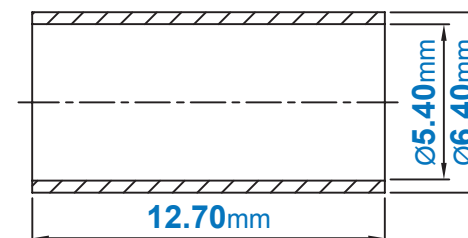
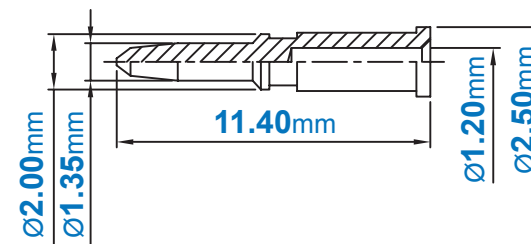


20-BNC-M-CR

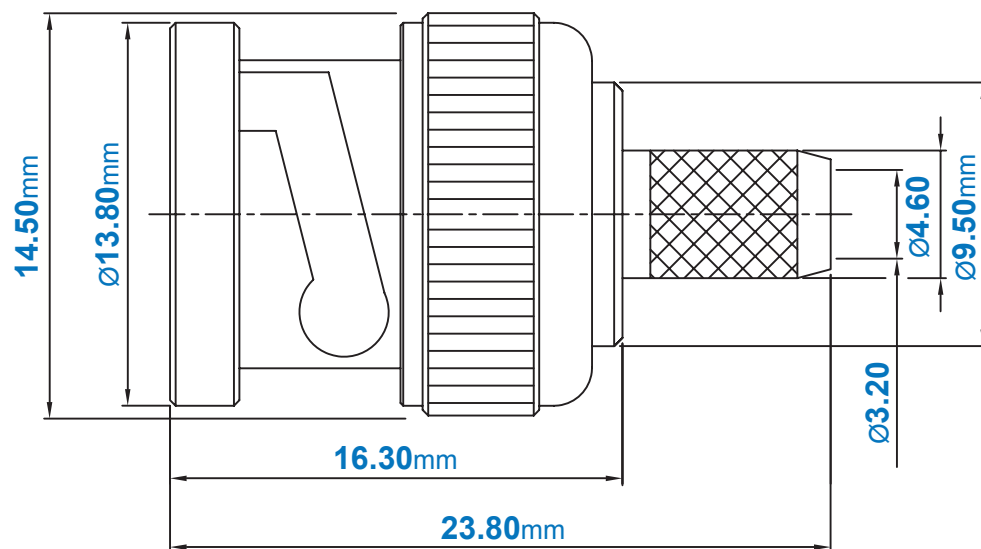

	Material	Coating
Body	BRASS	NICKEL
Pin	BRASS	GOLD
Dielectric	TEFLON	NONE
Ferrule	BRASS	NICKEL
Shell	BRASS	NICKEL
Washer	IRON	NICKEL
Spring	SK-5	NICKEL
Retaining Ring	SK-5	NICKEL
Gasket	RUBBER	NONE

* Major dimension
UNLESS OTHERWISE NOTED TOLERANCES
0.5-6=±0.2
6-30=±0.4
30-120=±0.6
120-315=±1.0
ANGLES=±1°

Unless otherwise specified
REMOVE ALL BURRS.
BREAK ALL CORNERS & EDGES CO.15 MAX.
CHAMFER 1ST & LAST THREADS 45°.
DIAMETERS ON COMMON CENTERS.
TO BE CONCENTRIC WITHIN 0.1 T.I.R.
ALL DIMENSIONS ARE AFTER PLATING.

RoHS 50 Ohm

BNC MALE CRIMP

Suitable for the following cable types
 RG58, CELF200, LMR195, LMR200, AIRCELL5
 ,Belden 9203, RG141, HDF200, RG142, RG400