
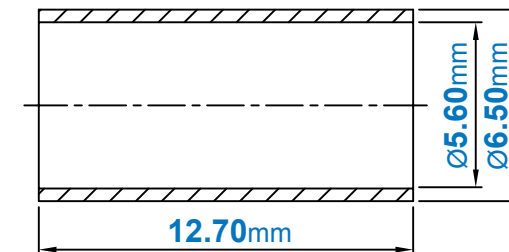
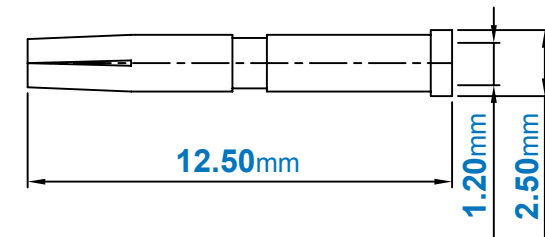


20-BNC1008

R/P Reverse Polarity

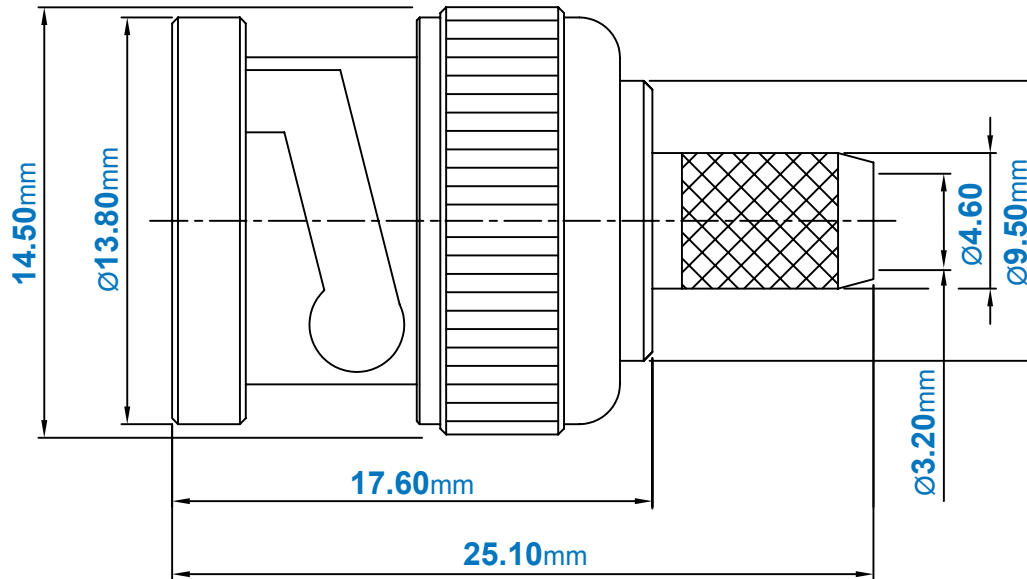

	Material	Coating
Body	BRASS	NICKEL
Pin	BRASS	GOLD
Dielectric	TEFLON	NONE
Ferrule	BRASS	NICKEL
Shell	BRASS	NICKEL
Washer	IRON	NICKEL
Spring	SK-5	NICKEL
Retaining Ring	SK-5	NICKEL
Gasket	RUBBER	NONE

* Major dimension
UNLESS OTHERWISE NOTED TOLERANCES
0.5-6=±0.2
6-30=±0.4
30-120=±0.6
120-315=±1.0
ANGLES=±1°

Unless otherwise specified
REMOVE ALL BURRS.
BREAK ALL CORNERS & EDGES CO.15 MAX.
CHAMFER 1ST & LAST THREADS 45°.
DIAMETERS ON COMMON CENTERS.
TO BE CONCENTRIC WITHIN 0.1 T.I.R.
ALL DIMENSIONS ARE AFTER PLATING.

RoHS 50 Ohm

BNC MALE R/P CRIMP

Suitable for the following cable types
RG58, CELF200, LMR195, LMR200, AIRCELL5
, Belden 9203, RG141, HDF200, RG142, RG400