


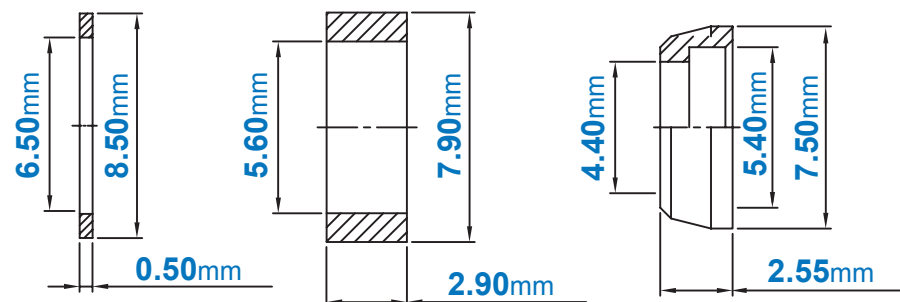


20-BNC-M-SLD

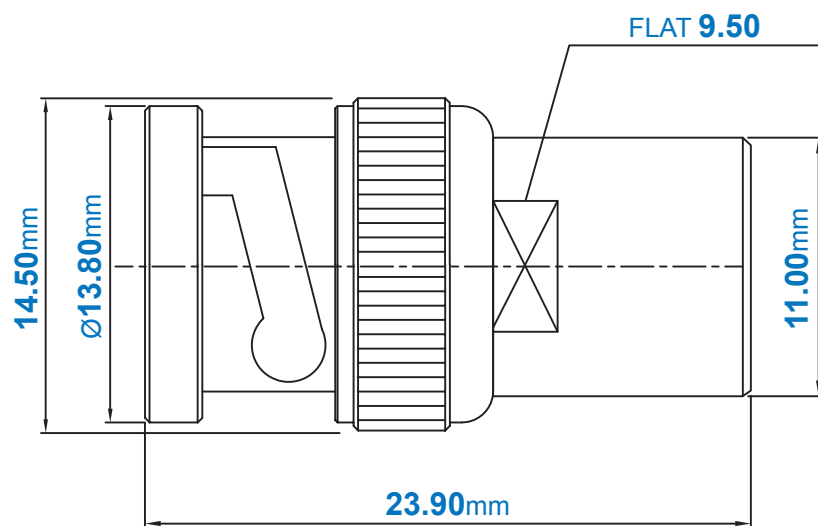

	Material	Coating
Body	BRASS	NICKEL
Pin	BRASS	GOLD
Dielectric	TEFLON	NONE
Ground Ring	BRASS	NICKEL
Shell	BRASS	NICKEL
Retaining Ring	BRASS	NICKEL
Gasket	SI-RUBBER	NONE
Clamp	BRASS	NICKEL
Gasket	SI-RUBBER	NONE
Washer	BRASS	NICKEL
Back Nut	BRASS	NICKEL

* Major dimension
UNLESS OTHERWISE NOTED TOLERANCES
0.5-6=±0.2
6-30=±0.4
30-120=±0.6
120-315=±1.0
ANGLES=±1°

Unless otherwise specified
REMOVE ALL BURRS.
BREAK ALL CORNERS & EDGES CO.15 MAX.
CHAMFER 1ST & LAST THREADS 45°.
DIAMETERS ON COMMON CENTERS.
TO BE CONCENTRIC WITHIN 0.1 T.I.R.
ALL DIMENSIONS ARE AFTER PLATING.

RoHS 50 Ohm

BNC MALE CLAMP

Suitable for the following cable types
 RG58, CELF200, LMR195, LMR200, AIRCELL5
 ,Belden 9203, RG141, HDF200, RG142, RG400