
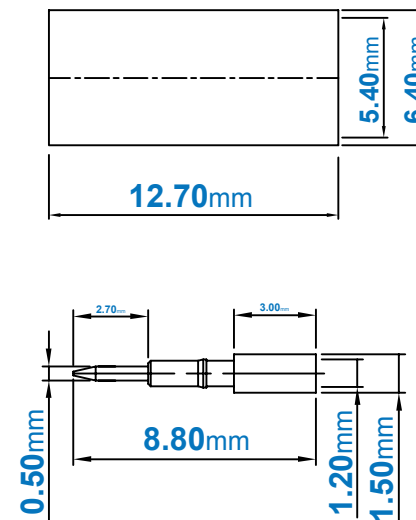


20-FAKRA1008

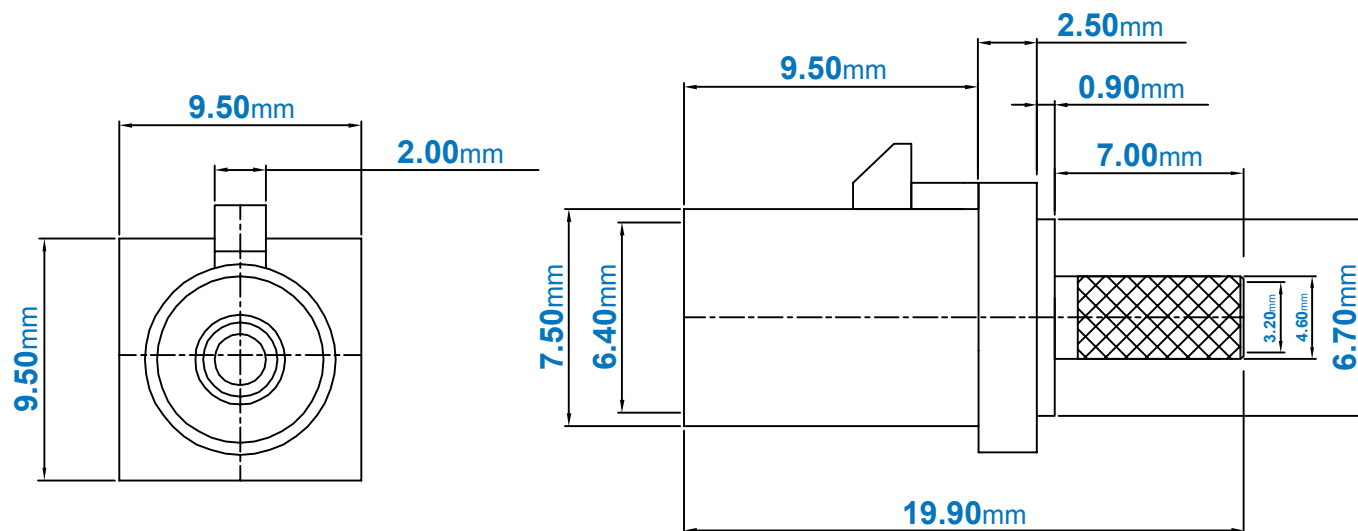

	Material	Coating
Ferrule	BRASS	NICKEL
Shell	DELIN	NONE
Washer	BRASS	NICKEL
Insulator	TEFLON	NONE
Pin	BRASS	GOLD
Body	BRASS	NICKEL

* Major dimension
UNLESS OTHERWISE NOTED TOLERANCES
0.5-6=±0.2
6-30=±0.4
30-120=±0.6
120-315=±1.0
ANGLES=±1°

Unless otherwise specified

REMOVE ALL BURRS.

BREAK ALL CORNERS & EDGES CO.15 MAX.

CHAMFER 1ST & LAST THREADS 45°.

DIAMETERS ON COMMON CENTERS.
TO BE CONCENTRIC WITHIN 0.1 T.I.R.

ALL DIMENSIONS ARE AFTER PLATING.

UNIVERSAL FAKRA



FAKRA Z MALE CRIMP

Suitable for the following cable types
RG58, CELF200, LMR195, LMR200, AIRCELL5
,Belden 9203, RG141, HDF200, RG142, RG400